

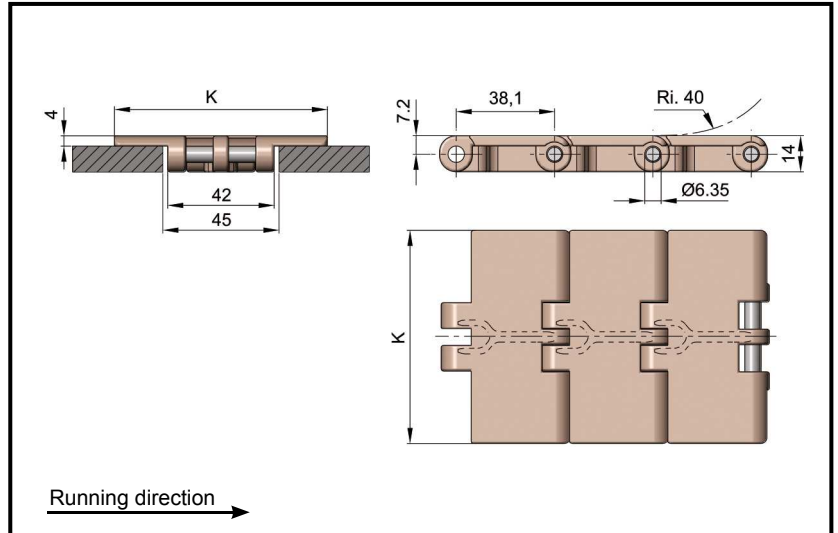


# SERIE 820 K330

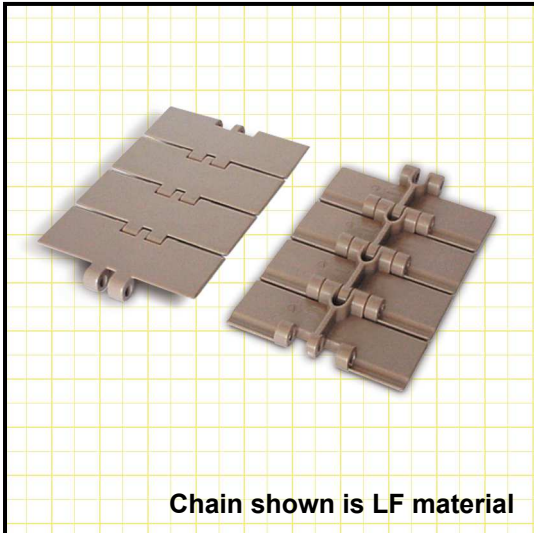

COD.	K		Kg/m		Open Surface	RM (mm)	*Ri (mm)
	mm	inch	KV	LF			
** 820 330	83,8	3,30	0,84	0,84	0%	-	40


\* Ri: Back-flex Radius

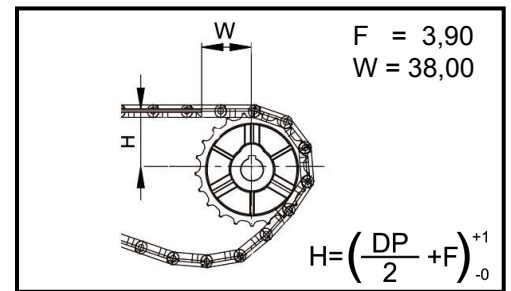

** Prefix	Chain material	Color	Ø Pin (mm)	Standard Pin Material	Minimum Temperature	Maximum Temp.		TT N	FDA Approval
						Dry enviroment	Wet enviroment		
LF	Acetal-LF	Brown	6,35	SS304	-40	+85	+70	1250	✓
KV ●	Acetal-Kevlar	Grey							


## Available types

Z	Ø De	Ø Dp
17	104	105,47

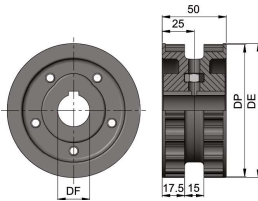


Split Sprocket

Z	Ø De	Ø Dp
19	117	117,34
21	129	129,26
23	141	141,20
25	153	153,20

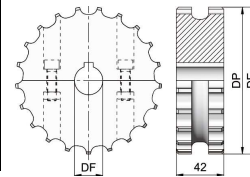


Split Wheel

Z	Ø De	Ø Dp
19	117	117,34
21	129	129,26
23	141	141,20
25	153	153,20

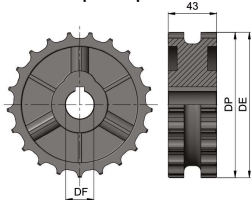


Solid Sprocket

Z	Ø De	Ø Dp
15	93	92,67
17	104	105,47
19	117	117,34
21	129	129,26
23	141	141,20
25	153	153,20
27	165	165,21
29	177	177,23

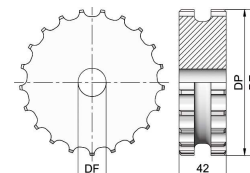

Solid Idler Wheel

Z	Ø De	Ø Dp
21	129	129,26
23	141	141,20
25	153	153,20

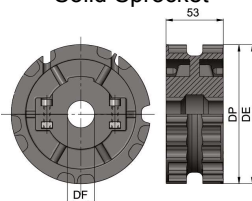

Split Idler Wheel

## Remarks

- Standard packaging 3,048m 10ft.
- ● Made to order
- LF Standard Production
- Other materials available under request